

Technical Data

BA26IP

Performances	rps	40	40	80	90	60
		A7W35	A2W35	A-7W35	A-15W35	A7W55
Heating Capacity	kW	6,01	4,64	7,01	6,16	8,53
Cooling Capacity	kW	4,91	3,58	4,57	3,72	6,08
Power In	kW	1,16	1,13	2,57	2,58	2,55
COP	-	5,18	4,12	2,72	2,38	3,35
Operating Current	A	5,5	5,4	12,3	12,3	12,2

Compressor

Type	BLDC Inverter		
Speed	15-110	1/s	
Oil	PZ68S	0,75	l
LRC	-	A	
Max. Op. Current	21	A	

Evaporator

Type	Coil		
Material	Al/Cu		
Heat Transfer Area	21	m ²	
Fin Spacing	2	mm	
Max Overpressure	4,2	Mpa	
Air Flow	max.3500	m ³ /h	
Fan Motor	max. 0,1	kW	
Fan Diameter	450	mm	
Speed	max.700	1/min	
Sound Power Level	53	dB"A"	
Defrost	reversal		

Condenser

Type	PHE		
Material	AISI316		
Water Flow	0,29	kg/s	
Minimum flow	0,14	kg/s	
Temp. Difference	5	K	
Water volume	7,0	l	
Max. Water Overp.	250	kPa	
Max. Ref. Overp.	4,2	MPa	
Pump Ext. Head	6,0	m	
Pump Motor	max.70	W	

Refrigerant Circuit

Refrigerant	R290		
Charge	0,9	kg	

Aux. Heater

Heating Capacity	4,5(+4,5)	kW
------------------	-----------	----

Controls

Controller	pCO5	
EEV	Yes	
Water Probe	Yes	
SHW Probe	Yes	
Outdoor Probe	Yes	
Dynamic Set Point	Yes	
Refrigerant Probe	2xPT	

Power Supply

Voltage	1x230 or 3x400 V	
Frequency	50	Hz
Max. Current C (H)	20/(16)/(16) A	

Connections and Dimensions

Hot Water	1	"OD
He x Wi x De	90x130x53 cm	
Weight	130	kg

Limits

Water Overpressure	0,25	MPa
Ref. Overpressure	2,9	MPa
Air Min/Max	-20/+35	°C
Water Min/Max	20/65	°C

*A2W35, acc. to EN14511, condenser dT=5K

"A2" Air Inlet +2°C

"W35" Water Outlet 35°C

Defrost energy considered.


Performance Tolerance EN14511

Ecodesign	35°C	55°C
Pdesign	6,83	6,74 kW
SCOP	4,90	3,66 -
ETAs	193	144 %
Rating	A+++	A++

Technical Data


BA26IP

Performance *

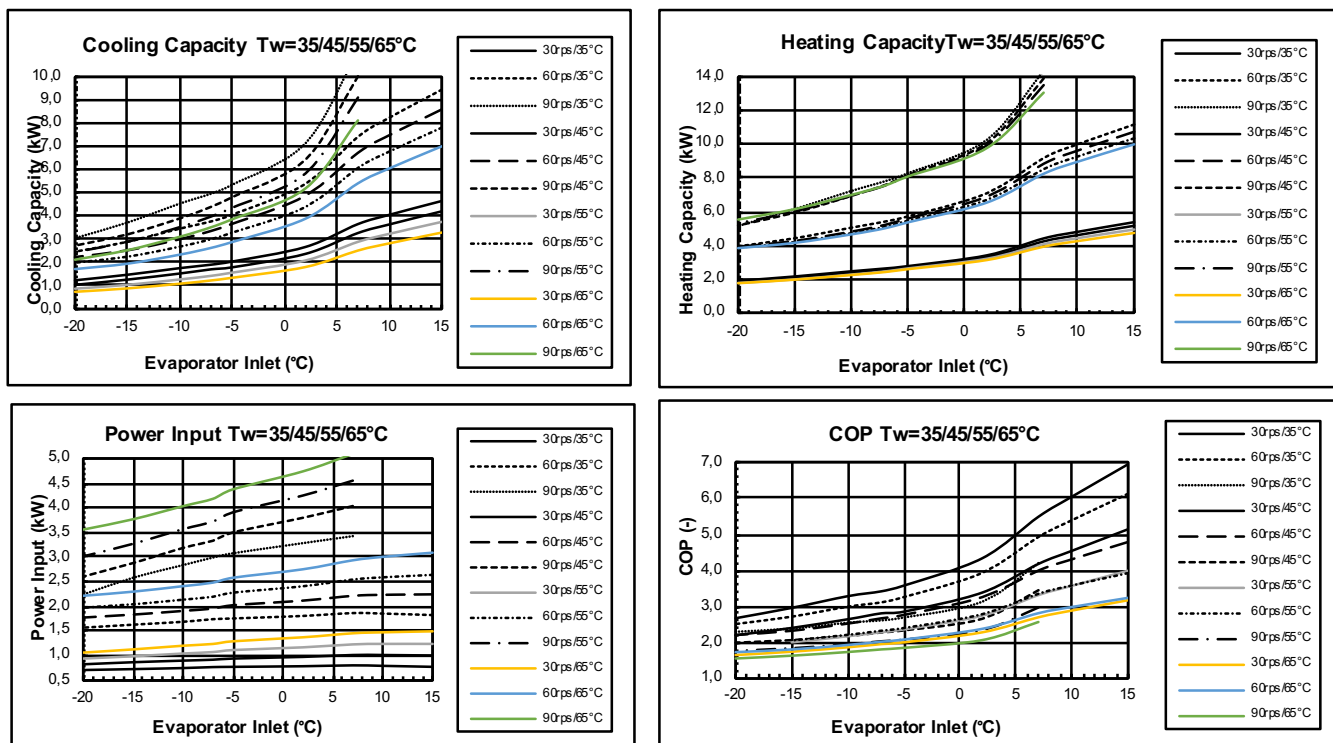

* Performance Tolerance $\pm 5\%$, defrost energy included

Dimensions, Connections

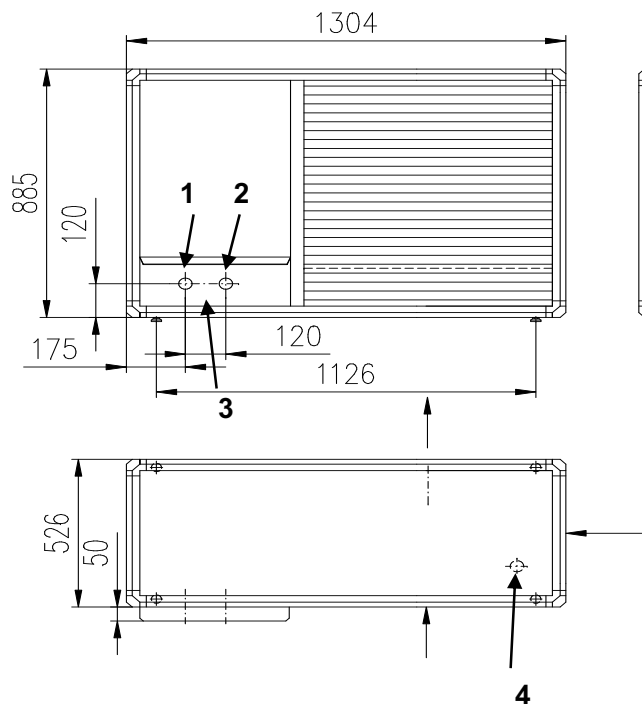

1. heating outlet 1" OD
2. heating inlet 1" OD
3. electrical cables bushing
1xPG21
1xPG29
4. draining outlet flex.40mm

